

# ActiveLED™ WP Series

## Exterior Wall Pack Light



### Overview

G2LED Lighting with patented ActiveLED technology creates excellent perimeter and security lighting for building exteriors. The Wall Pack Light achieves energy savings of 50-85 percent over conventional lighting sources. The intelligent controller and options enable advanced energy management capabilities, thereby providing additional savings.

The 90,000-hour LED lumen life is superior to any other light available today. Imagine a light lasting for 20 years when used an average of 12 hours a day.

### Technical Specifications

Dimensions	18.5"W x 8.5"H x 6"D (47.0 x 21.6 x 15.2 cm)
Mounting	Standard wall pack bolts
Light Output	3960 LED Device Lumens
Fixture Watts	40 watts
Efficacy	110 LED Device Lumens/Watt
CCT	5500K
Power Factor	>.95
Input Voltage	100-277V AC
Lumen Lifetime	90,000 hours (95% Luminous Flux)
Weight	9 lbs. (4 Kg)
Listings and Tests	UL and CE listed, suitable for damp locations. RoHS compliant, LM-79 and LM-80 info available. IP-65 rating.

### Key Features & Benefits

- Significant Energy Savings  
:: Replaces up to 200 watt fixture with 40 watt fixture
- Ideal for exterior wall mount lighting applications
- Replaces yellow or dim lighting with more visible "white light" for uniformity of coverage and enhancing security
- LEDs do not emit ultraviolet light so bugs are not attracted to the ActiveLED fixture
- Full cut-off directional light (dark-sky compliant)
- Environmentally safe lighting
  - Zero mercury content
  - Eliminates disposal of hazardous material
  - Facilitates LEED credits
- Options
  - Digital Dimmer
  - Occupancy Sensor
  - Dusk-to-Dawn Sensor
  - Battery Backup
  - Finish: Black, Brown and Charcoal Grey, custom colors also available
- Warranty  
:: 10 years on LED elements, 5 years on materials and workmanship
- Made in the USA  
:: Designed and manufactured exclusively by Ringdale


# ActiveLED™ WP Series

## Exterior Wall Pack Light

### Photometric Light Level Data for WP-4551 LED Wall

The schematics show the light level measurements for the WPH-4551 LED Wall Pack at a mounting height of 11'.

The data shows that the LED Wall Pack provides excellent coverage for 2-3 times its mounting height.

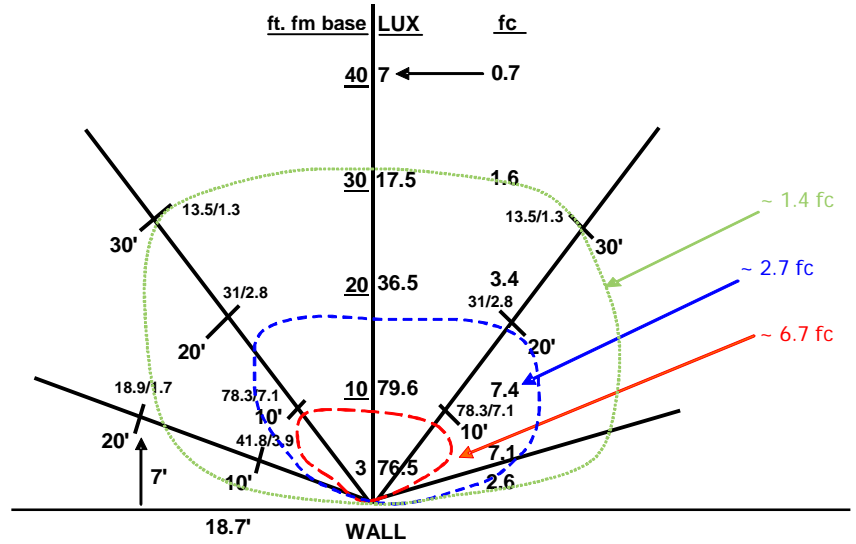

**INFORMATION | SALES | PRICING**  
 Caberra Systems, Inc.  
 47025 WCR 26 1/2, Wiggins, Colorado 80654  
 DIRECT: 970.506.0525 | FAX: 970.373.4552  
[www.g2led.com](http://www.g2led.com) | Email: [sales@g2led.com](mailto:sales@g2led.com)

